


Graphic VFD Module

GU128X32D-7003

Ref: MC-031 Dec.12, 06

- Character Graphic, Transformerless display
- Single 5V power supply
- High Brightness Blue Green display
- Operating temp -40°C to +85°C
- Proportional and scalable fonts
- Screen saver & window definition function
- 8 level brightness control function
- CMOS serial Interface

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller Ics with refresh RAM, character generator and interface logic. This module have CMOS sync or asyn serial interface. The module can simultaneously display graphic pattern and / or characters on screen.

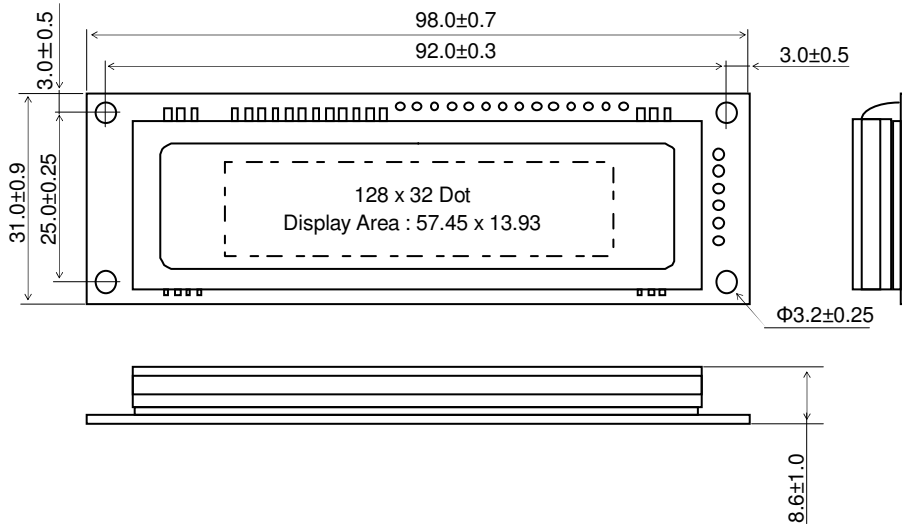

Unit : mm

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value
Power Supply Voltage	VCC	5.0VDC Typ.
Power Supply Current	ICC	300mADC Typ.
Logic High Input	VIH	0.8VCC min. VCC max.
Logic Low Input	VIL	0VDC min. 0.2VCC max.
Logic High Output	VOH	3.8VDC min. VCC max.
Logic Low Output	VOL	0VDC min. 0.6 VDC max.

OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
PCB Size (X x Y mm)	98.00 x 31.00
Display Area (X x Y mm)	57.45 x 13.93
Dot size / Pitch (X x Y mm)	0.3 x 0.29 / 0.45 x 0.44
Luminance	700 cd/m ² Typ.
Color of Illumination	Blue Green (Filter for more colors)
Operating Temperature	-40°C to +85°C
Operating Humidity	20 to 80 % RH (non condensing)

SOFTWARE COMMANDS - Popular codes, more included

Command	Code
Write Character to Display	20H~FFH
BS, HT, LF, CR, Display Clear	08H, 09H, 0A, 0DH, 0CH
Cursor Set	1FH 24H xL xH yL yH
Initialize Display	1BH 40H
Specify International Font	1BH 52H n
Vertical / Horizontal Scroll Mode	1FH 02H / 1FH 03H
Screen Saver	1FH 28H 61H 40H p
Display Blink	1FH 28H 61H 11H p t1 t2 c
Bit Image Display Group	1FH 28H 66H 11H xL xH
Font Magnified Display	1FH 28H 67H 40H x y
Character Display Width	1FH 28H 67H 03H w
Brightness Level Setting	1FH 58H n

COMMON FONT

	2	3	4	5	6	7
xH	0	1	2	3	4	5
x1H	6	7	8	9	A	B
x2H	C	D	E	F	G	H
x3H	I	J	K	L	M	N
x4H	O	P	Q	R	S	T
x5H	U	V	W	X	Y	Z
x6H	[\]	^	_	`
x7H	{		}	~		
x8H						
x9H						
xAH						
xBH						
xCH						
xDH						
xEH						
xFH						

INTERNATIONAL FONTS

	8	9	A	B	C	D	E	F
xH	0	1	2	3	4	5	6	7
x1H	8	9	A	B	C	D	E	F
x2H	G	H	I	J	K	L	M	N
x3H	O	P	Q	R	S	T	U	V
x4H	W	X	Y	Z	[\]	^
x5H	_	`	{		}	~		
x6H								
x7H								
x8H								
x9H								
xAH								
xBH								
xCH								
xDH								
xEH								
xFH								

CMOS Serial Interface - CN2

Pin	Asyn. Sig	Syn. Sig
1	VCC	VCC
2	SIN	SIN
3	GND	GND
4	SBUSY	SBUSY
5	NC	SCK
6	/RESET	/RESET

CN1 is not used on this Module

Please inquire for full specification.

** Subject to change without notice **